
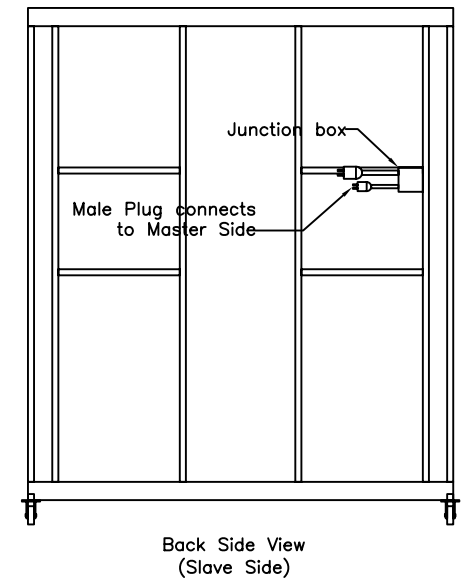
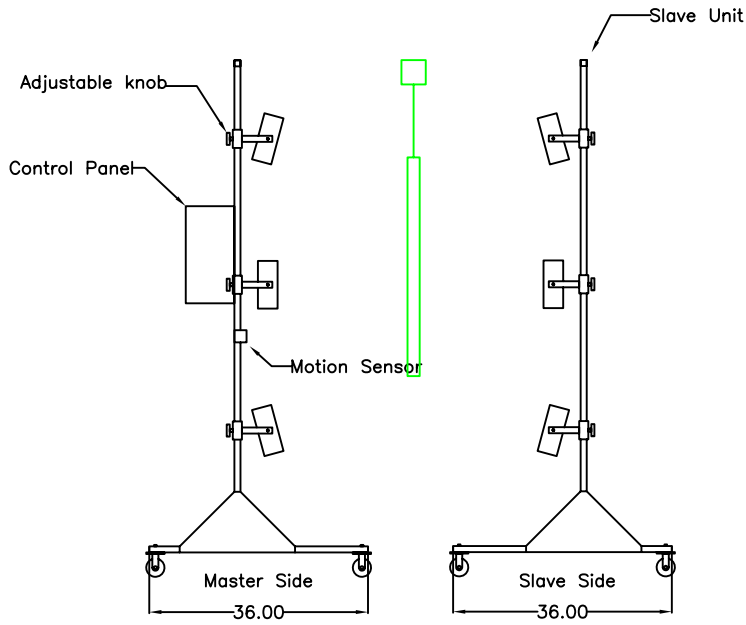


Portable Unit with motion sensor

System uses 12 halogen elements controlled by a 3" one zone control panel. A timed motion sensor activate the system. A percentage timer with 8:1 IR Sensor controls and monitor part temperature. Each heat bar panels can be raised, lowered and pivot for maximum flexibility in focusing heat. All surfaces use highly reflective aluminum.

Power: 22KW @480V 3 phase ~27Amps

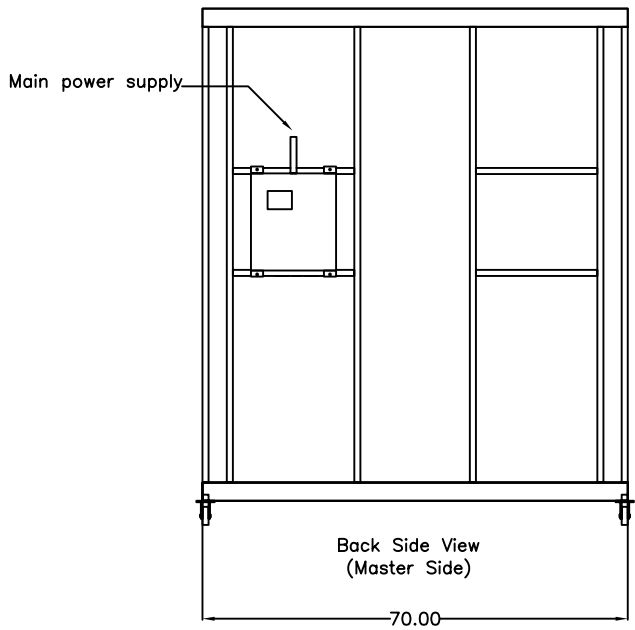

<p>THIS DRAWING IS THE PROPERTY OF PRIME HEAT AND SHALL NOT BE COPIED OR REPRODUCED IN TOTAL OR IN PART WITHOUT THE EXPRESSED PERMISSION OF PRIME HEAT.</p> <p>THIS DRAWING WAS PREPARED WITH THE SOLE INTENT AS A GUIDE FOR THE PURPOSE OF THE INHOUSE MANUFACTURE OF A PRODUCT AND THE MAINTENANCE THEREOF.</p> <p>IT IS THE RESPONSIBILITY OF THE CONSUMER TO INSURE THAT ONLY QUALIFIED ELECTRICAL PERSONNEL UTILIZE THIS DOCUMENT.</p>	<p>JOB NUMBER</p>	<p><b>PRIME HEAT SYSTEMS</b></p> <p>1844 Friendship Drive El Cajon, CA 92020 (619) 449-6623 www.primeheat.biz</p>	<p>TITLE</p> <p>Prime Heat Portable Unit</p>
	<p>DRAWN</p> <p>T. Lin 10/24/2011</p>		
	<p>CHECKED</p>	<p>SCALE</p> <p>NONE</p>	<p>REV</p>
	<p>SHEET</p> <p>1 OF 1</p>	<p>DWG No.</p> <p>PH1 and 2</p>	<p>1</p>